
JSP
JAPAN SPEED PERFORMANCE

TURBOCHARGER

PERFORMANCE TEST REPORT

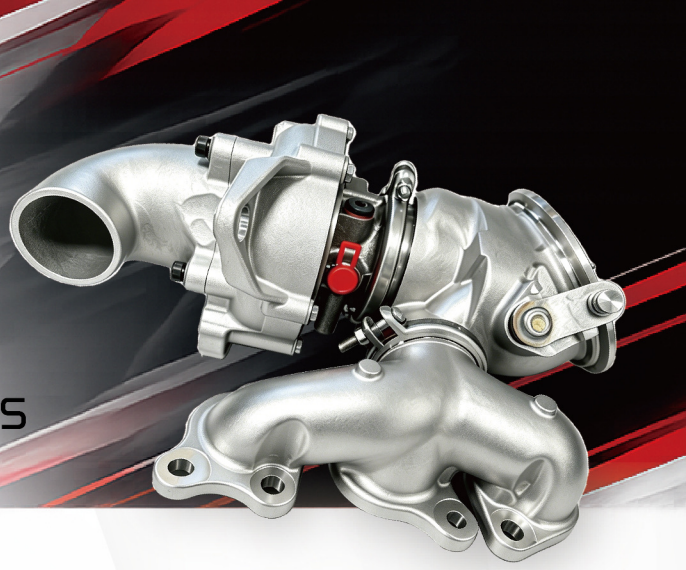

TOYOTA GR YARIS/COROLLA G16E-GTS

VEHICLE MODIFICATIONS

TURBOCHARGER SYSTEM	TURBO	JSP GR Yaris - Pro-max
	INTERCOOLER	HKS Intercooler
ECU & FUEL	ECU	Custom remap of the stock ECU on the ECUTEK platform
	FUEL	Retail-pump 98-octane gasoline
INTAKE & EXHAUST	INTAKE	Eventuri carbon-fiber intake kit
	EXHAUST	Upgrade the full exhaust system
ENGINE	ENGINE	Upgraded reinforced valve springs

TEST RESULT SUMMARY

Wheel - Horsepower
358 HP


Max - Torque
468 Nm

Max Boost Threshold
4000 RPM

Max Boost Pressure
2.0 Bar


Max Supported RPM
180000 RPM

POWER & TORQUE CURVE

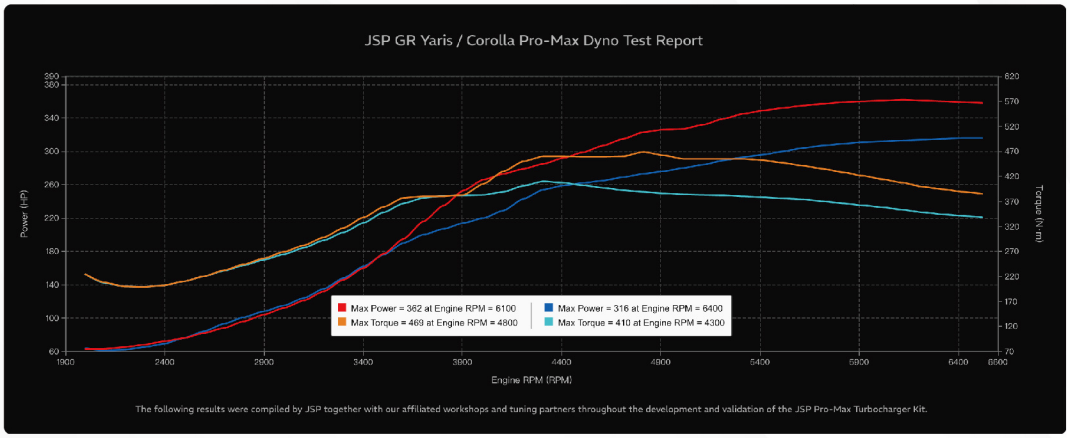

Contact Us for More Info

	STOCK	JSP VERSION
WHEEL - HORSEPOWER	250 HP	358 WHP
TORQUE	409 Nm	468 Nm
MAX BOOST PRESSURE	1.6 Bar	2.0 Bar
BOOST THRESHOLD	4268 RPM	4000 RPM
CD	56 mm	64 mm
TD	53 mm	54 mm

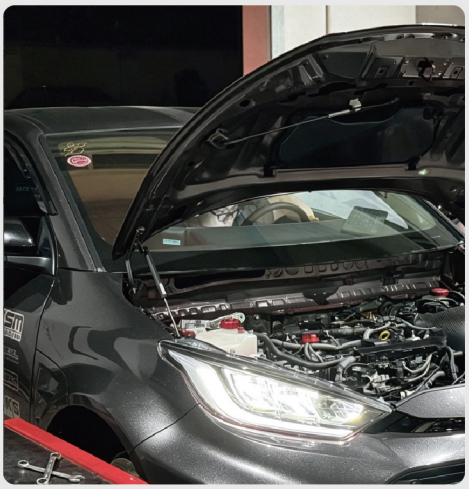

Test Location : SHANGHAI